

---

This item was submitted to [Loughborough's Research Repository](#) by the author.  
Items in Figshare are protected by copyright, with all rights reserved, unless otherwise indicated.

## **Influence of boundary conditions on starvation of piston ring conjunction**

PLEASE CITE THE PUBLISHED VERSION

<http://www.wtc2017.org/en>

VERSION

SMUR (Submitted Manuscript Under Review)

PUBLISHER STATEMENT

This work is made available according to the conditions of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International (CC BY-NC-ND 4.0) licence. Full details of this licence are available at:  
<https://creativecommons.org/licenses/by-nc-nd/4.0/>

LICENCE

CC BY-NC-ND 4.0

REPOSITORY RECORD

Bewsher, Stephen R., Mahdi Mohammadpour, Homer Rahnejat, and Gunter Offner. 2019. "Influence of Boundary Conditions on Starvation of Piston Ring Conjunction". figshare. <https://hdl.handle.net/2134/25834>.

# Influence of Boundary Conditions on Starvation of Piston Ring Conjunction

S.R. Bewsher<sup>1\*</sup>, M. Mohammadpour<sup>1</sup>, H. Rahnejat<sup>1</sup> and G. Offner<sup>2</sup>

<sup>1</sup> Wolfson School of Mechanical, Electrical and Manufacturing Engineering, Loughborough University,  
Loughborough, LE113TU, England

<sup>2</sup> AVL List GmbH, Graz, Austria

\*Corresponding author: [s.r.bewsher@lboro.ac.uk](mailto:s.r.bewsher@lboro.ac.uk)

## Abstract

It is important to determine realistic inlet boundary conditions to correctly predict lubricant film thickness and generated frictional power losses in all tribological conjunctions. This is also true of piston compression ring as well. A 2D hydrodynamic solver using Reynolds equation is to analyse the differences between predicted conditions with a flooded inlet and that arising from a more realistic determined zero-reverse boundary condition for lubricant flow post inlet wedge stagnation point. The case of a cylinder of a 4-cylinder 4 stroke gasoline engine, running at the engine speed of 1500rpm is considered. The results show that with a more detailed and realistic inlet boundary a significant reduction in the minimum film thickness is predicted which leads to increased friction throughout the engine cycle.

**Keywords:** Piston compression ring; inlet boundary condition, Starvation

## Nomenclature

$b$	Ring face-width
$c$	Ring crown height
$d$	Ring radial width (thickness)
$g$	Ring end gap
$k$	Contact speed ratio
$l$	Connecting rod length
$P_c$	Combustion pressure
$r$	Crank-pin radius
$r_0$	Nominal bore radius

## Greek Symbols

$\vartheta_i$	Ratio of the film thickness at the stagnation point to the central contact film thickness
$\vartheta_s$	Ratio of the film thickness at the rupture point to the central contact film thickness
$K$	Conformability coefficient (factor)
$\rho_0$	Lubricant density at atmospheric pressure
$\sigma$	RMS composite surface roughness
$\varsigma$	Pressure coefficient of boundary shear strength of asperities
$\tau_0$	Eyring shear stress

## 1. Introduction

Improved fuel economy and reduction of emissions are key drivers for increased efficiency of internal combustion (IC) engines. In an IC engine 15-20% of the

overall losses can be attributed to friction, 40-50% of which are as a result of the piston-cylinder system [1, 2]. Therefore, accurate numerical prediction of frictional losses is quite important, which is critically dependent on all assumptions made, particularly the employed boundary conditions.

A fully-flooded inlet is usually assumed in most hydrodynamic analyses, including for piston ring to cylinder liner contact [3, 4, 5]. However, experimental investigations with instrumented floating liners have shown that for much of the engine cycle in situ generated friction points to the prevalence of mixed and boundary regimes of lubrication with observed wear, particularly at piston dead centre reversals. One reason for this is lack of a sufficient lubricant meniscus the inlet wedge of the contact for parts of the piston cycle [6, 7, 8]. Even with a sufficient volume of lubricant at the inlet to the conjunction, there are swirl and reverse flows which reduce the inbound volume of lubricant into the conjunction as shown in [9, 10]. The same is true of many other contacts, including under elastohydrodynamic conditions in rolling element bearings, observed as well as predicted [3, 10, 11, 12].

This paper demonstrates the necessity for determination and use of realistic inlet boundary conditions to correctly predict lubricant film thickness and generated frictional power losses.

## 2. Methodology

Tipei [9] showed that although the two-dimensional solution of Reynolds equation is applicable for practical problems, the justification for a two-dimensional flow continuity condition is only valid for special cases. It was shown experimentally that only a fraction of the inlet lubricant flow was drawn between the two surfaces for a given surface, load and speed, forming swirl on the upstream with reverse flow from the contact [12, 13].

By applying the Swift-Steiber boundary condition at the contact inlet ( $dp/dx = 0$  and  $p = 0$ ), Tipei [9] derived an expression between the film thickness at the inlet and outlet exit positions maintaining the continuity of flow condition as:

$$\frac{\cosh \mathcal{G}_e}{\cosh \mathcal{G}_i} = 1 - \frac{f(k)}{6(1+k)} \quad (1)$$

and:

$$\tanh \mathcal{G}_e - \left[ 1 - \frac{f(k)}{6(1+k)} \right] \tanh \mathcal{G}_i - \left[ 1 - \frac{f(k)}{6(1+k)} \right] \cosh \mathcal{G}_i \times [\arcsin(\tanh \mathcal{G}_e) - \arcsin(\tanh \mathcal{G}_i)] = 0. \quad (2)$$

$\mathcal{G}_e$  is the ratio of the lubricant film thickness at the exit position to that at the centre of the contact, whilst  $\mathcal{G}_i$  is the same for the inlet position.  $k$  is the ratio of the velocities of the contiguous surfaces and  $f(k)$  is a characteristic determined by the value of  $k$ . Calculation of the parameters from Equations (1) and (2), obtaining the minimum film thickness and distribution across the conjunction allows for calculation of the inlet stagnation and outlet separation points from the centre of the ring. The work of Mohammadpour et al. [11] and Birkhoff and Hays [12] agree with this assumption.

Using the proposed method of Tipei [9], it is possible to determine the position where an inlet boundary condition should be applied, as opposed to assuming a fully flooded inlet and in order to maintain flow continuity.

### 3. Results and Discussion

The proposed method is used to simulate an engine cycle of a C-segment vehicle with a 4-cylinder 4-stroke gasoline engine at a running speed 1500rpm with full throttle. The chosen speed corresponds to the vehicle running at 35km/h in 3<sup>rd</sup> gear in the New European Drive Cycle (NEDC), which is important for measurement of emission, particularly in cold operating condition. The engine torque is 52.03Nm.

The model uses finite differences for the solution of a 2D Reynolds equation to obtain the generated hydrodynamic pressure distribution as shown by Bewsher et al. [14]. The input parameters for the engine, lubricant and material surfaces are provided in Tables 1, 2 and 3. Figure 1 shows the combustion pressure,  $P_c$ , throughout the engine cycle.

Table 1: Engine data

Parameters	Values	Units
Torque	52.03	Nm
No. of cylinders	4	-
Engine type	Gasoline SI	-
Crank-pin radius, $r$	39.75	mm
Connecting rod length, $l$	138.1	mm
Bore nominal	44.52	mm
Ring crown height, $r_0$	10	$\mu$ m
Ring axial face width, $b$	1.15	mm
Ring radial width, $d$	3.5	mm
Ring free end gap, $g$	10.5	mm

Table 2: Lubricant properties in atmospheric pressure and 40°C

Parameters	Values	Units
Lubricant viscosity, $\eta_0$	0.05	kg/ms
Lubricant density, $\rho_0$	833	kg/m <sup>3</sup>
$a_0$	$1 \times 10^{-8}$	m <sup>2</sup> /N
Eyring shear stress, $\tau_0$	2	MPa

Table 3: Material properties and surface topographical parameters

Parameters	Values	Units
Liner material	Grey cast iron	-
Modulus elasticity of liner material	92.3	GPa
Poisson ratio for liner material	0.211	-
Density for liner material	7200	kg/m <sup>3</sup>
Ring material	Steel SAE 9254	-
Modulus elasticity of ring material	203	GPa
Poisson ratio for ring material	0.3	-
Roughness parameter ( $\zeta K \sigma$ )	0.04	-
Measure of asperity gradient ( $\sigma/K$ )	0.001	-
Shear strength of asperities ( $\zeta$ )	0.17	-
Density for ring material	7700	kg/m <sup>3</sup>

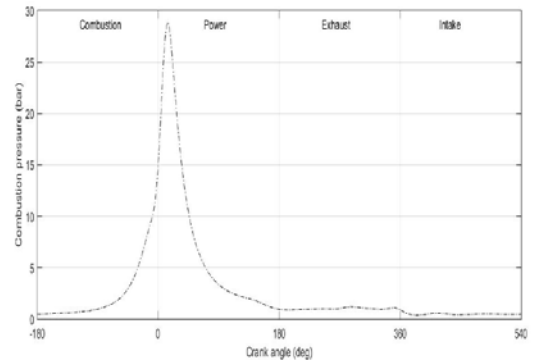


Figure 1 Combustion Pressure

The results obtained are for the predicted minimum film thickness and total friction within the piston ring conjunction. The position of top dead centre (TDC) occurs when the crank angle is at 0° at the onset of the power stroke, with combustion occurring at 20°.

Figure 2 shows the minimum film thickness variation within the piston ring conjunction. It can be seen that by applying Tipei's inlet condition, placing the inlet boundary at the stagnation point, where no reverse flow takes place, there is a reduction in the lubricant film as a result of inlet starvation. There is maximum

film thickness reduction of  $4\text{ }\mu\text{m}$  at the midpoint of each engine stroke. This reduction in minimum film thickness leads to increased conjunctional friction as shown in Figure 3.

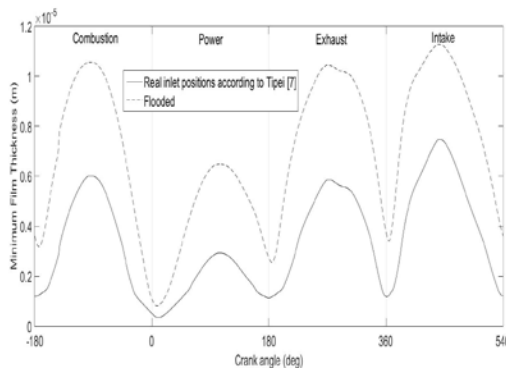


Figure 2 Cyclic variation of minimum film thickness

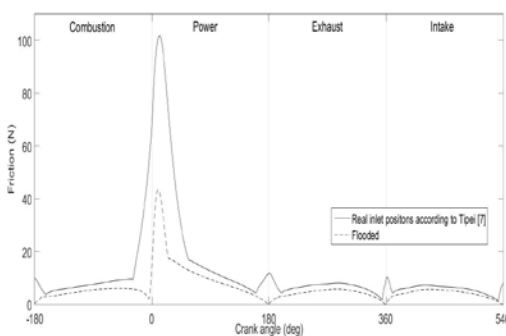


Figure 3 Cyclic total (asperity and hydrodynamic) friction

#### 4. Concluding Remarks

The paper presents the effect of boundary conditions on starvation of the piston ring conjunction. The analysis shows that by correct positioning of the inlet boundary there is a reduction in the thickness of entrained lubricant to the conjunction, and thus increased frictional power losses. The results show that by accounting for starvation within the piston ring conjunction and not assuming a fully flooded condition it is possible to bridge the gap between theoretical predictions and experimental measurements.

#### 5. Acknowledgements

The authors would like to express their gratitude to the Engineering and Physical Sciences Research Council (EPSRC) and AVL List for the financial support extended to this research.

#### 6. References

- [1] Tung, S.C. and McMillan, M.L., "Automotive tribology overview of current advances and challenges for the future", *Tribology Int.*, 2004, 37: 517-536.
- [2] Fitzsimons, B., "Introduction to the importance of fuel efficiency and role of the Encyclopaedic research project", In *IMEchE Seminar: A Drive for fuel efficiency*, Loughborough, 2011.
- [3] Morris N, Rahmani R, Rahnejat H, King PD and Fitzsimons B. "Tribology of piston compression ring conjunction under transient thermal mixed regime of lubrication", *Tribology Int.*, 2013; 59: 248-258.
- [4] Rahmani R, Theodossiades S, Rahnejat H and Fitzsimons B. "Transient elastohydrodynamic lubrication of rough new or worn piston compression ring conjunction with an out-of-round cylinder bore". *Proc IMechE Part J: Journal of Engineering Tribology*, 2012, 226(4): 284-305.
- [5] Chang WR, Etsion I and Bogoy DB. "An Elastic-Plastic Model for the Contact of Rough Surfaces", *J. Tribology*, 1987; 109 (2): 257-263.
- [6] Sherrington I. "Measurement techniques for piston-ring tribology", *Tribol Dyn Engine Powertrain: Fundam, Appl Future Trends*, 2010; 387.
- [7] Furuhashi S and Sasaki S. "New device for the measurement of piston frictional forces in small engines", *SAE Technical Paper*: 831284; 1983.
- [8] Gore M, Theaker M, Howell-Smith S, Rahnejat H and King P. "Direct measurement of piston friction of internal-combustion engines using the floating-liner principle", *Proc IMechE, Part D: J Automob Eng.*, 2014, 228 (3): 334-354.
- [9] Tipei N. "Boundary conditions of viscous flow between surfaces with rolling and sliding motion", *Trans. ASME, J. Lub. Tech., Series F9*, 1968, pp.254-261.
- [10] Shahmohamadi H, Rahmani R, Rahnejat H, Garner CP and King PD, "Thermo-mixed hydrodynamics of piston compression ring conjunction", *Tribology Letters*. 2013, 51(3):323-340.
- [11] Mohammadpour M, Johns-Rahnejat PM, Rahnejat H and Gohar R., "Boundary conditions for elastohydrodynamics of circular point contacts", *Tribology Letters*. 2014, 53(1):107-118.
- [12] Birkhoff G and Hays DF., "Free boundaries in partial lubrication", *J. Mathematics and Physics*, 1963, 42(1):126-138.
- [13] Knapp RT, Daly JW and Hammitt FG., "Cavitation", McGraw Hill, 1970
- [14] Bewsher SR, Turnbull R, Mohammadpour M, Rahmani R, Rahnejat H, Offner G and Knaus O., "Effect of cylinder deactivation on the tribological performance of compression ring conjunction", *Proc IMechE, Part J: J. Engineering Tribology*, 2017: 1350650116684985